




QUICK GUIDE

BP-1 COMPACT BASS PREAMP/D.I.

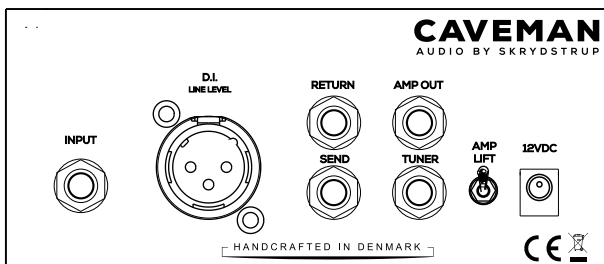

INPUT

This is where you connect the cable from your instrument.

D.I. OUT

The D.I. output is transformer balanced to avoid any hum/noise issues, and eliminates the need for an external D.I./Line Driver.

This output is designed for loads of 2Kohm or higher, making it perfect for mixing consoles / DAW.

This is a Line Level output – NOT mic. level – so if a Line Channel is available, you should use that.

If not, make sure that the input gain on your mixing desk / DAW is set to its minimum.

SEND

This signal goes to the input of your first stomp box.

RETURN

Connect the output of your last stomp box to this 1/4" jack.

The Send/Return is placed after the input buffer, but before the actual bass preamp.

TUNER

Isolated Tuner Output. Always active.

AMPOUT

Transformer isolated 1/4" TRS output to feed an external amplifier.

The amplifier connected must be earthed/grounded.

AMPLIFT

Ground Lift switch for Amp Out. Set for minimum noise/hum.

12VDC

12VDC@400mA. Center negative. Will accept both 2.1 and 2.5mm plug.

Set both GAIN and LEVEL at 12 o'clock - that's a good starting point.