




QUICK GUIDE

AP-1 ACOUSTIC PREAMP/D.I.

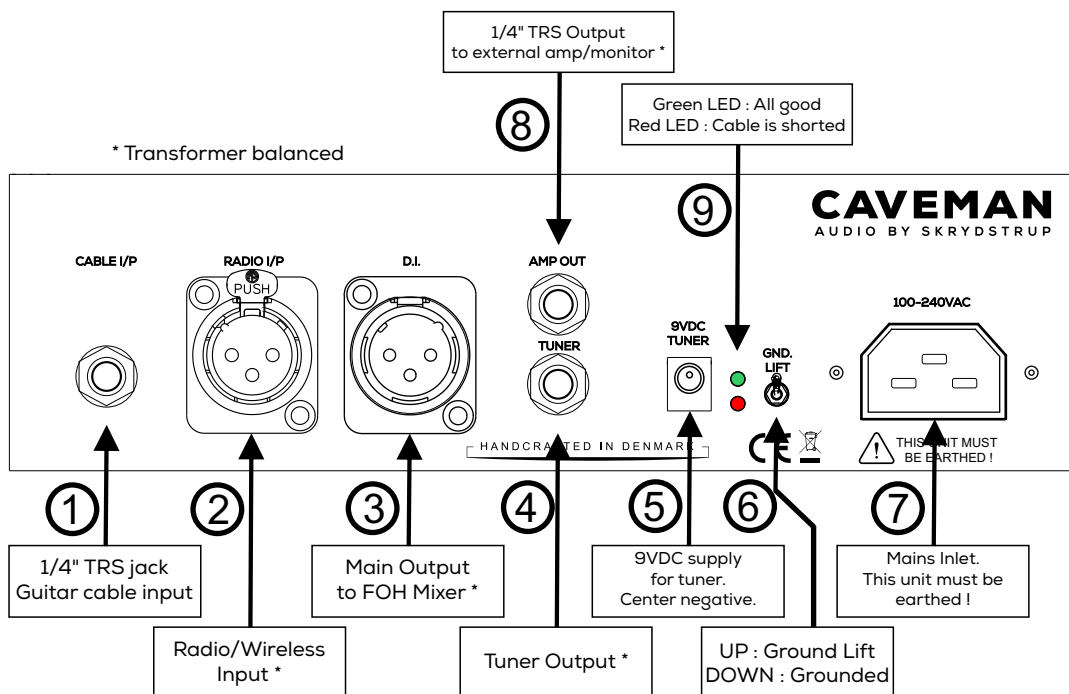

1. This is where you connect the cable from your guitar.
2. This is where you connect the output from your wireless receiver.
Transformer isolated balanced 3-pin XLR female bushing - pin 2 is hot, pin 3 is cold, and pin 1 is ground/screen. The cable input has priority over the Radio/Wireless input.
3. Main output to FOH/Mixing desk.
Transformer balanced isolated 3-pin XLR male bushing - pin 2 is hot, pin 3 is cold, and pin 1 is ground/screen.
4. Transformer isolated Tuner Output. Always active.
5. 9VDC @ 50mA supply to power your tuner. Center negative.
6. System Ground Lift switch. Set for minimum noise/hum.
7. Mains Inlet. Will accept 100-240VAC 50/60Hz.
8. Additional transformer isolated 1/4" TRS output to feed an external amplifier.
The amplifier connected must be earthed/grounded.
9. Visual indication of the 9VDC supply. If the red LED lights, either the cable or the tuner is shorted.
Change the defect part and re-connect. The 9VDC output is short-circuit protected.